

Simply
efficient



GLASS AND DISHWASHERS





Simply efficient



By purchasing a Eurowash glasswasher or dishwasher you're making a **smart choice**: not dictated by trends or status symbols, but by the desire of using a working tool that is reliable and safe and that, for many years, will do what you really want: **perfectly wash** your tableware.

You can trust Eurowash, because it's a brand by the Eurotec group, one of the major dishwasher manufacturers in the world, that in its first forty years of activity has produced over **800.000 dishwashers**, thus building an incomparable experience and expertise.

Eurotec invests in the research of innovative solutions that are able to guarantee true advantages to the users of our products and it can rely on specialised production factories among the most modern in the world. These modern production techniques, as well as an ISO 9001 certified system, allow producing **state of the art product** of the highest quality.



SINCERT



EUROWASH GLASS AND DISHWASHERS



Performance - Eurotec's R&D has allowed developing washing circuits fully exploiting the pump power thus reducing dispersion to the minimum. For instance, the washing arm is made with an extremely resistant polymer material which is much lighter than steel; this way the pump power is used to wash the dishes and not to turn the washing arm.

Intuitive use - Thanks to the electromechanical user interface and the many safety devices, Eurowash machines are able to reduce the staff training period as well as the chances for error to the minimum. The intrinsically clean construction simplifies and quickens the end-of-shift cleaning routines, allowing you to return home to your family earlier and enjoy more spare time.

Durability over the years - Eurowash dishwashers use high quality components, all of European origin, to guarantee durability as well as the highest product availability. Accurate certified quality controls, complete the creation process of our dishwashers. However, quality derives from design. This is the reason why around 20% of the production factory personnel are composed of R&D technicians and engineers.

Assistance - Eurowash dishwashers are distributed exclusively by specialised retailers to whom the company provides the training and the technological support in order to guarantee the best possible assistance. The spare parts are quickly available at competitive prices, since they are distributed by Eurotec Service, a Eurotec group specialised division, founded with exactly this purpose.

Glasswashers



330 340 341 350



Eurowash glasswashers cover all


the requirements of the market, from small cupwashers to larger machines for those places that require washing large amounts of glasses and beer mugs. The range includes machines with 35 x 35 cm, 38.5 x 38.5 cm e 45 x 45 cm baskets. Special versions equipped with round baskets are also available, to merge with the shape of the bar counter tanks.

The water consumption is very low and all the models are equipped with a thermostop system that can be activated upon request to guarantee maximum hygiene.

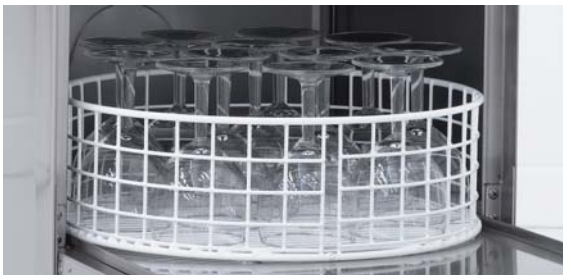

The 341 and 350 models, provided with upper washing ramps, can also work as auxiliary dishwashers when equipped with the special dish baskets (optional). Moreover, the 350 model has two washing cycles in order to offer maximum versatility.

An impeccable result when washing glasses is determined not only by the machine, but also by the water quality and therefore, the use of specific softening or demineralisation systems are required.



Dishwashers

360 363



Eurowash undercounter dishwashers feature great versatility,

ensured by two washing cycles, a fast one for lightly dirty glasses and dishes and a standard one, as well as a 34 cm door opening, allowing to wash even the largest underplates. This way, no tableware needs to be washed by hand.



These two models have a single-phase connection with hot water supply and a three-phase connection with cold water supply, respectively. In any case, the Thermostop device ensures the correct temperature for rinsing. The built-in tank filter is available as an option, while the Eurowash price list includes a wide range of optional baskets, which allow washing any type of tableware in the proper way.



Front Loading Dishwashers

373





A true wild card in the kitchen, this powerful and ergonomic machine meets the requirements of all those places where large amounts of tableware are washed but where space problems do not allow installing a front loading dishwasher. Its great load capacity and its 40 cm clearance allow washing also trays and tools.



Versatility is enhanced by two washing cycles, a fast one for lightly dirty glasses and dishes and a standard one. This way, up to dishes/hour can be washed.

The tank filter is optional and allows trapping the toughest residues of dirt so to further ease the end-of-shift cleaning routine.

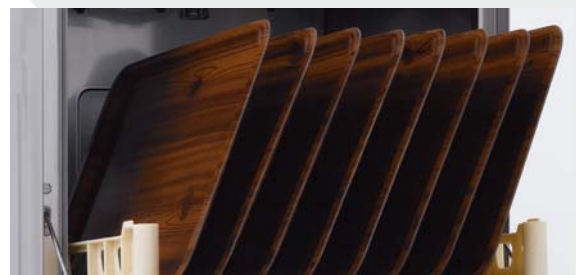

Hood Type Dishwashers

383 393




The Eurowash hood type dishwasher range includes two state of the art models

that differ for power and productivity. The 383 model can wash up to 720 dishes/hour, while the 393 model can reach 1.080 dishes/hour with the standard basket and 1.320 dishes/hour with the 54 x 54 cm basket (optional), which can hold up to 22 dishes. A wide range of accessories is available to optimise the washing area functionality, as well as a large number of special baskets to wash any type of tableware correctly.



Eurotec's main goal is to make your work easier, this is why our hood type dishwashers are extremely easy to clean, thanks to the sophisticated construction technology such as the tank moulded in a single piece with the surface plane, placed in a frontal position to avoid the operator to "dive" inside, and equipped with a double built-in filter. The hygiene of your dishes is ensured by the high temperature rinsing, thanks to powerful boilers together with a thermostop control system, which prevents starting up the rinsing phase if the water temperature in the booster heater is not correct.



Technical specifications



		330	340	341	350	
Dimensions wxdxh	cm	40x48x59	44x53x67	44x53x69	53x55x71	
Rack dimensions	cm	35x35	38,5x38,5	38,5x38,5	45x45	
Door/hood opening	cm	20	26	29	26	
Max. glasses height	cm	19	25	28	25	
Double-walled door		yes	yes	yes	yes	
Power supply	V/Hz/ph	230/50/1	230/50/1	230/50/1	230/50/1	
Max. power required	Kw	3,5	3,5	3,5	2,9	
Water supply temperature	°C	50	50	50	50	
Water supply pressure	bar	2 - 4	2 - 4	2 - 4	2 - 4	
Water consumption	lt/rack	2,4	2,6	2,6	3,2	
Tank capacity	lt	8	9	9	24	
Short cycle duration	sec	--	--	--	90	
Standard cycle duration	sec	150	150	150	150	
Tank filter		no	no	no	no	
Thermostop		activatable	activatable	activatable	activatable	
Version with round rack		330 RB	340 RB	341 RB	--	
		360	363	373	383	393
Dimensions wxdxh	cm	58x62x83	58x62x83	60x60x122	71x74x150	71x74x150
Rack dimensions	cm	50x50	50x50	50x50	50x50	50x50
Door/hood opening	cm	34	34	40	40	40
Double-walled door		yes	yes	yes	--	--
Power supply	V/Hz/ph	230/50/1	400/50/3*	400/50/3*	400/50/3**	400/50/3
Max. power required	Kw	3,6	5,5	5,5	8,6	10,3
Water supply temperature	°C	50	15 - 50	15 - 50	15 - 50	15 - 50
Water supply pressure	bar	2 - 4	2 - 4	2 - 4	2 - 4	2 - 4
Water consumption	lt/rack	3,2	3,2	3,2	3,2	3,2
Tank capacity	lt	30	30	30	17	20
Short cycle duration	sec	90	90	90	90	60
Standard cycle duration	sec	150	150	150	150	120
Tank filter		optional	optional	optional	optional	optional
Thermostop		yes	yes	yes	yes	yes

*Convertible electric power supply at 230/50/3 e 230/50/1N - **Convertible electric power supply at 230/50/3 - Technical data not binding



EUROTEC s.r.l. - 37048 San Pietro di Legnago - VERONA - "ITALY"
Tel. +39 0442 634311 - Fax +39 0442 629132

